

REV	DESCRIPTION	DATE

SPECIFICATIONS





Current Rating: 1.5 Amps
 Insulator resistance: 1000 Megohms Min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Brass
 Insulator Material: NYLON 6T
 Finish: GOLD Plated
 Resistance to soldering heat:
 260° C +-5° C
 5+-0.5sec

Storage humidity : 30%-70%
 Storage time: semi annual

Recommended P. C. Board Hole Layout

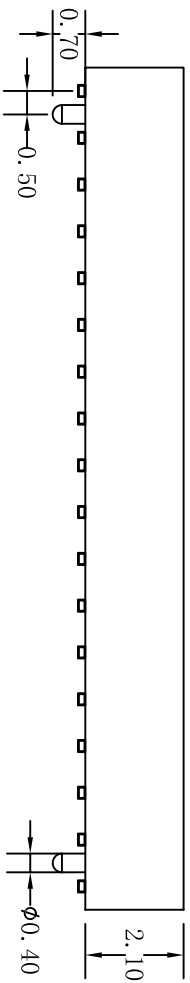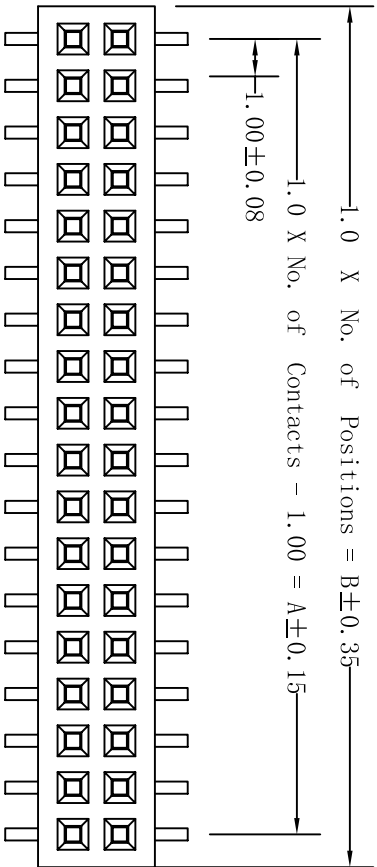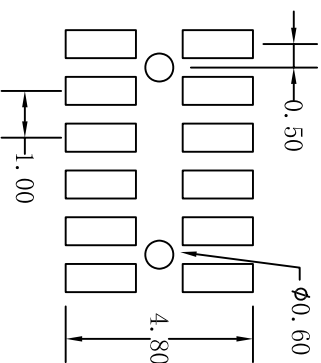

REV.	UNIT	SCALE	GENERAL TOLERANCE		
1.0	mm	1:1	X.° ±5°	.X° ±	DATE
			X. ±5°	.X ±0.38	20120727
			XX. ±5°	.XX ±0.38	DATE
			XXX. ±5°	.XXX ±0.38	DATE

CNT
 肯耐特电子有限公司

DRAWN	DATE	DWG. NO.
Ares	20120727	
CHECK	DATE	PART. NO.
		CNT-F100-2*xx-GM-210-P
APPROVE	DATE	TITLE
		1.00 Female Header Dual Row With Post SMT Type

DATE	DATE	DATE

DATE	DATE	DATE

DATE	DATE	DATE