

REV.	LOGS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	05-10-05*	D-M-XIA
02	Δ	變更料號	2009.02.23	林澤云





Specifications

Current Rating: 0.5Amp
 Insulation Resistance: 500M Ω Min.
 Dielectric Withstanding: 200VAC
 Contact Resistance: 40m Ω Max.
 Operating Temperature: -40°C to +105°C
 Max Process Temp: 230°C for 30~60 sec.

Materials

Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 LCP+30%GF

Δ All materials must meet Green requirement for environment protection

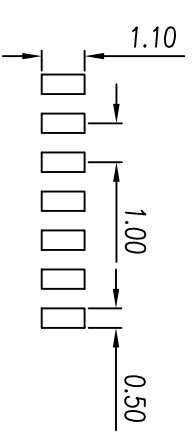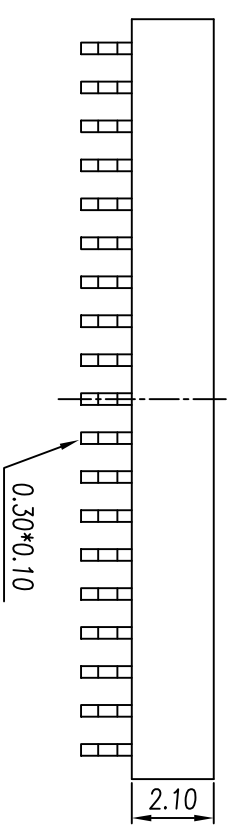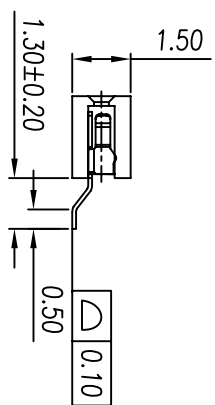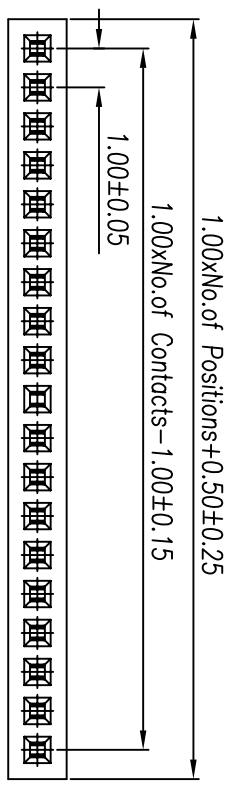

RECOMMENDED P.C. BOARD LAYOUT

CNT 肯耐特电子有限公司

REV.	UNIT	SCALE	
02	mm	5:1	

CUSTOMER COPY			
GENERAL TOLERANCE			
X:(REF)	± 5°	X	± 0.38
X	± 2°	.XX	± 0.25
X X'	± 1°	.XXX	± 0.13

DRAWN	
林澤云	DATE
李新華	DATE
Link	DATE

DATE	
2009.02.23	DATE
2009.02.23	DATE
2009.02.23	DATE

DWG. NO.	
CSGD116-A001C1AX	
PART NO.	
CNT-F200-1*XX-GDM-210	

TITLE	
1.00 FEMALE HEADER	
SINGLE ROW SMT TYPE	