


Pitch:2.00mm (0.079")

Dual Row Female Header Straight Dip Type



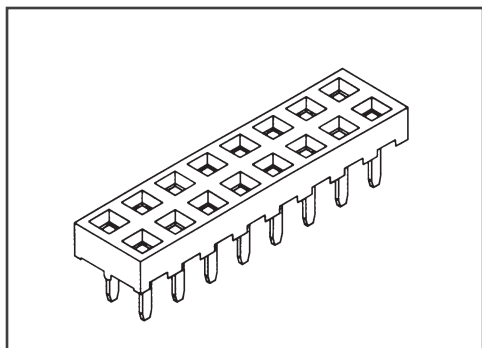


SPECIFICATIONS


Current Rating:2.0 Amps
 Insulator resistance:1000 Megohms Min.
 Dielectric withstanding:AC 500 V
 Contact Resistance:20 Megohms Max
 Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Copper Alloy
 Insulator Material:NYLON-6T UL94V-0
 Finish:Gold/Tin Plated

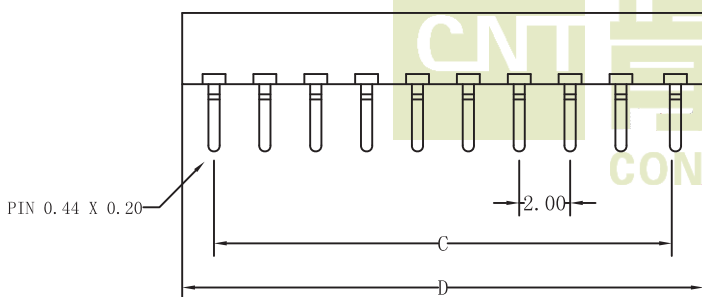

Recommended P. C. Board Hole Layout



No. of Pins Per Row		03~40
Dimension		
C	2.00*No.of Contacts-2.0	±0.25
D	2.00*No.of Contacts	±0.38

Ordering Information

F 200 2 * XX G S 280 B
 F: Pitch: 2: No. of pins per Row
 Female 2.00mm Dual Row
 G: GoldPlated
 S: Straight
 T: Tin Plated
 280: Plastic Height
 B: Custom Length Available