


# Pitch:2.00mm (0.079")

## Dual Row Female Header S.M.T Type With Post

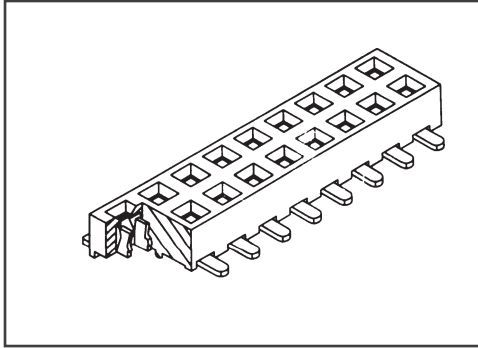


### SPECIFICATIONS


Current Rating:2.0 Amps  
 Insulator resistance:1000 Megohms Min.  
 Dielectric withstanding:AC 500 V  
 Contact Resistance:20 Megohms Max  
 Operating Temperature:-40° C - +105° C

### MATERIALS

Contact Material:Copper Alloy  
 Insulator Material:NYLON-6T UL94V-0  
 Finish:Gold/Tin Plated

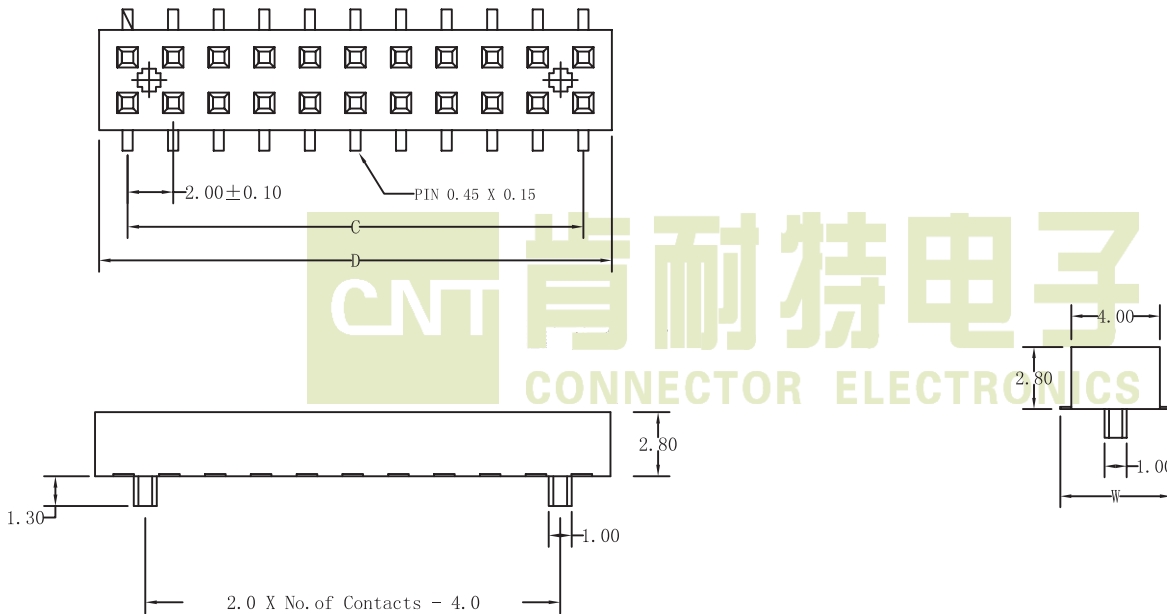

### Recommended P. C. Board Hole Layout

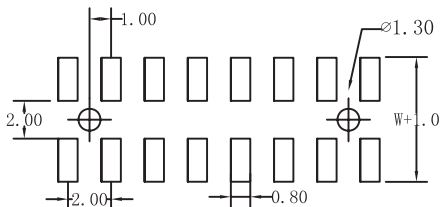

No. of Pins Per Row		03~40
Dimension		
C	$2.00 * \text{No. of Contacts} - 2.0$	$\pm 0.25$
D	$2.00 * \text{No. of Contacts}$	$\pm 0.38$

### Ordering Information

**F 200 2 \* XX G M 280 P W**  
 F: Pitch: 2: No. of pins per Row G: GoldPlated M: S.M.T 280 Plastic Height P Post W 5.80MM Custom Length Available  
 Female 2.00mm Dual Row T: Tin Plated