


REV	DESCRIPTION	DATE

SPECIFICATIONS


Current Rating: 2 Amps
 Insulator resistance: 1000 Megohms Min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Phosphor Bronze
 Insulator Material: NYLON 6T UL94V-0
 Finish: Gold Plated

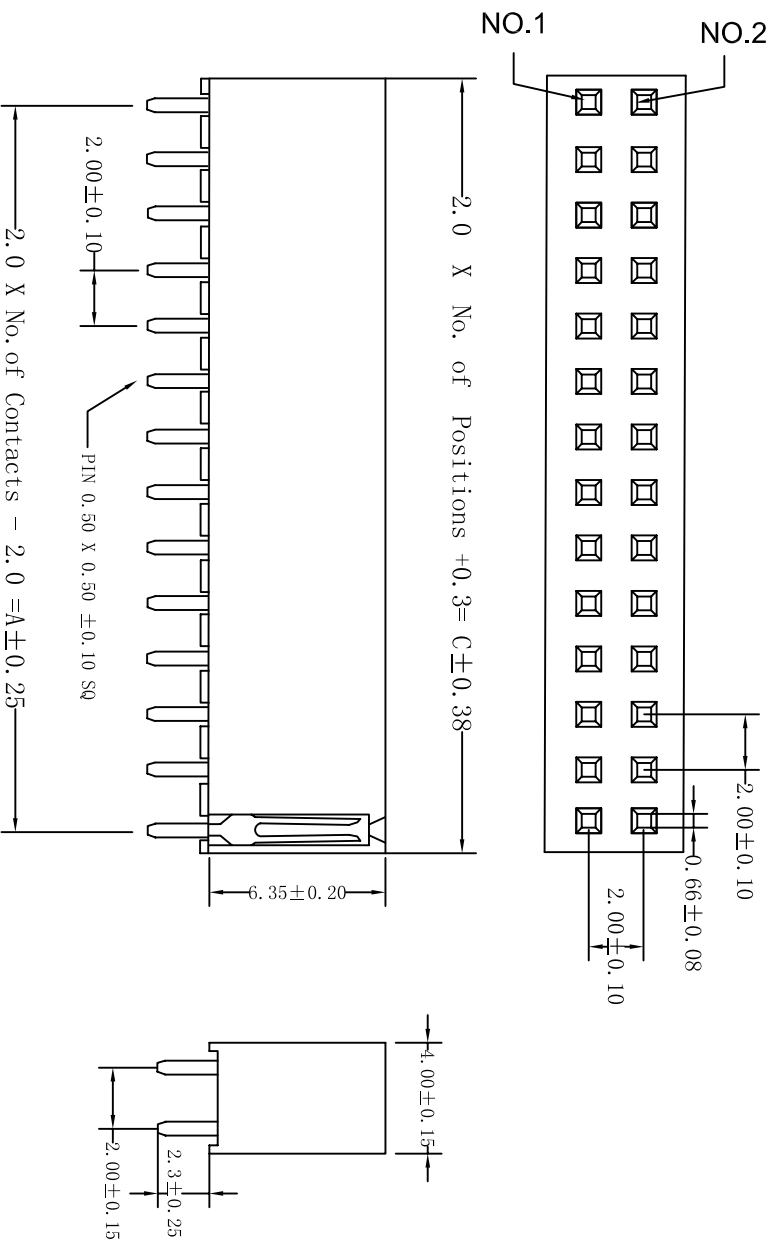

**Recommended P. C. Board
 Hole Layout
 Tolerance: 0.05mm**

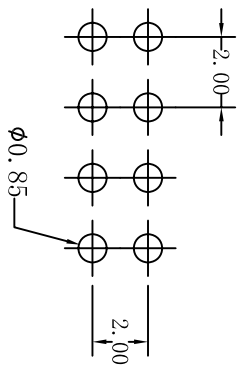

A	E
B	F
H	W

CNT

肯耐特电子有限公司

REV.	UNIT	SCALE	GENERAL	TOLERANCE
2.0	mm	1:1	X. ° ± 5°	. X° ± 0.30
			. XX ± 5°	. X ± 0.25
			. XXX ± 5°	. XXX ± 0.10

DRAWN Ares		DATE 2011.03.16	DWG. NO.	TITLE
CHECK		DATE	PART. NO.	2.0mm Female Header Dual Row Dip Type Base 6.35mm Height
APPROVE		DATE	CNT-F200-2*XX-GS-635/2.3	