

REV	DESCRIPTION	DATE






### SPECIFICATIONS

Current Rating: 2.0 Amps  
 Insulator resistance: 1000 Megohms Min.  
 Dielectric withstanding: AC 500 V  
 Contact Resistance: 20m  $\Omega$  Max  
 Operating Temperature: -40° C - +105° C

### MATERIALS

Contact Material: Brass  
 Insulator Material: NYLON 6T  
 Finish: Gold Plated  
 Resistance to  
 soldering heat: 260° C +5° C  
 5+ -0.5sec

Recommended P. C. Board  
 Hole Layout

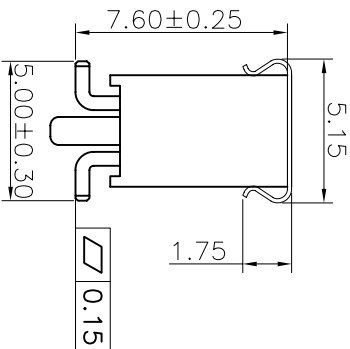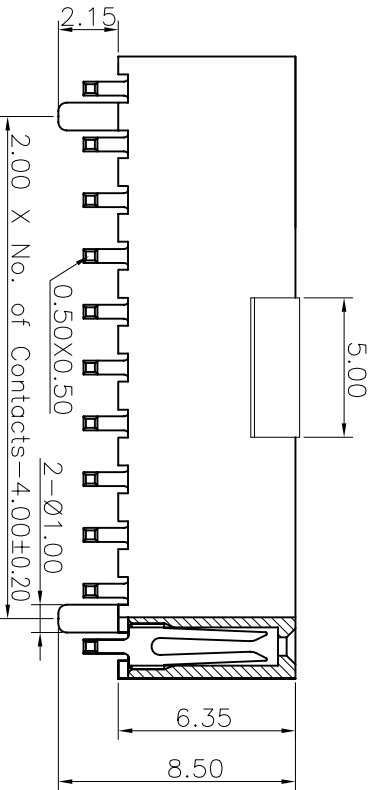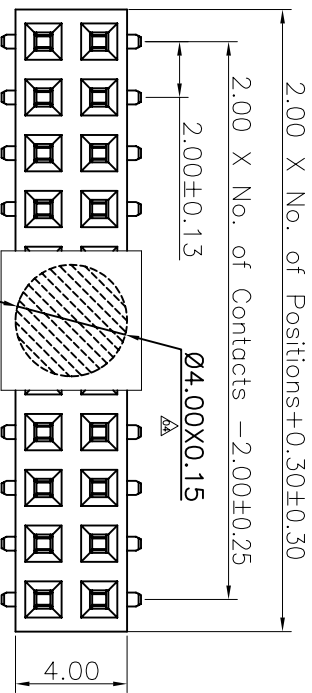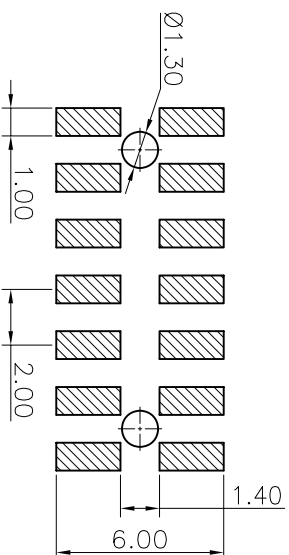

A	E
B	F
H	W

**CNT** 肯耐特电子有限公司

REV.	UNIT	SCALE
A	mm	1:1

#### GENERAL TOLERANCE

X.° ±5°	X. ±0.38
.X.° ±4°	.X. ±0.25
.XX.° ±3°	.XX. ±0.15
.XXX.° ±2°	.XXX. ±0.10

#### DRAWN

Ares

#### DATE

20140617

#### DWG. NO.

CNT-F200-2\*xx-GM-635/5.0-P-TR

#### TITLE

2.00mm

#### DATE

Female Header Dual Row SMT Type