


Pitch:2.54mm (0.1")

Single Row Pin Header Straight Dip Type

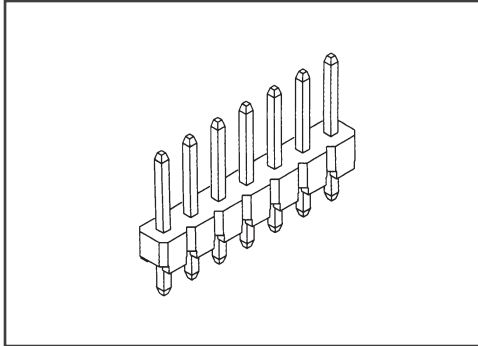


SPECIFICATIONS


Current Rating: 3 Amps
 Insulator resistance: 1000 Megohms Min.
 Dielectric withstanding: AC 500 V
 Contact Resistance: 20 Megohms Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Brass
 Insulator Material: 30% Glass filled
 P. B. T UL94V-0
 Finish: Gold / Tin Plated over nickel

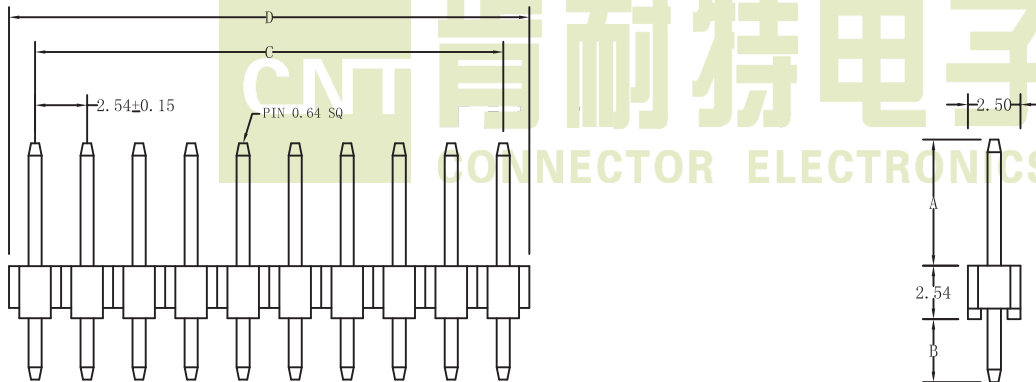

Recommended P. C. Board
Hole Layout



No. of Pins Per Row		02~40
Dimension		
C	2.54*No.of Contacts-2.54	±0.25
D	2.54*No.of Contacts	±0.38

Ordering Information

M 254 1 * XX G S A/B
 M: Pitch: 1: No. of pins per Row
 Male 2.54mm Single Row
 G: GoldPlated
 S: Straight
 A/B: 6.0mm/3.0mm Custom Length Available
 T: Tin Plated