


Pitch:2.54mm (0.1")

Dual Row Pin Header Straight Dip Type

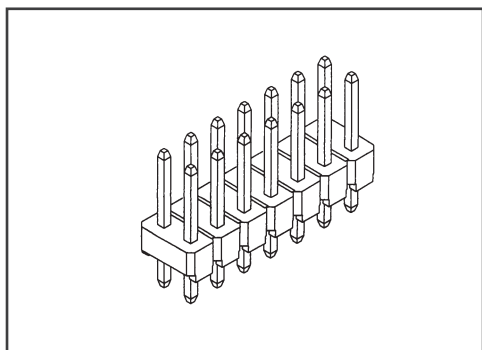


SPECIFICATIONS



Current Rating: 3 Amps
 Insulator resistance:1000 Megohms Min.
 Dielectric withstanding:AC 500 V
 Contact Resistance:20 Megohms Max
 Operating Temperature:-40° C - +105° C

MATERIALS


Contact Material:Brass
 Insulator Material:30% Glass filled
 P. B. T UL94V-0
 Finish:Gold /Tin Plated over nickel



NO. 1

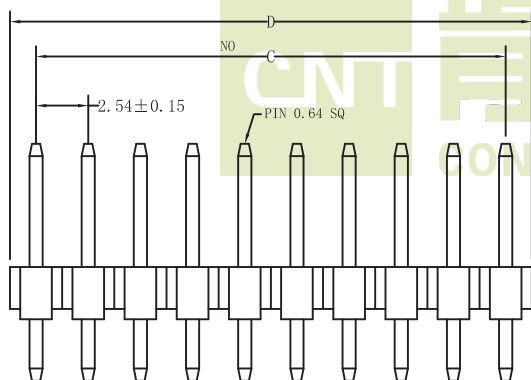

Recommended P. C. Board Hole Layout



No. of Pins Per Row		02~40
Dimension		
C	2.54*No.of Contacts-2.54	±0.25
D	2.54*No.of Contacts	±0.38

Ordering Information

M 254 2 * XX G S A/B
 M: Pitch: 2: No. of pins per Row: G: GoldPlated S: Straight A/B: 6.0mm/3.0mm Custom Length Available
 Male 2.54mm Dual Row
 T: Tin Plated