


Pitch:2.54mm (0.1")

Dual Row Box Header With Lock Straight Dip Type

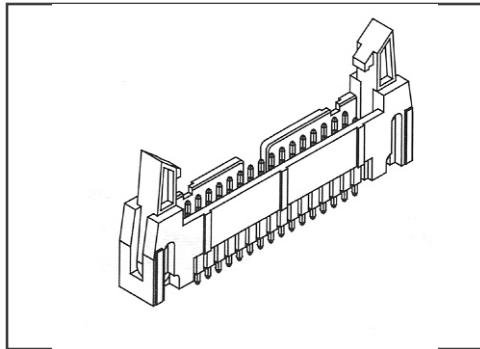


SPECIFICATIONS


Current Rating: 3 Amps
 Insulator resistance:1000 Megohms Min.
 Dielectric withstanding:AC 500 V
 Contact Resistance:20 Megohms Max
 Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Brass
 Insulator Material:30% Glass filled
 P. B. T UL94V-0
 Finish:Gold /Tin Plated over nickel

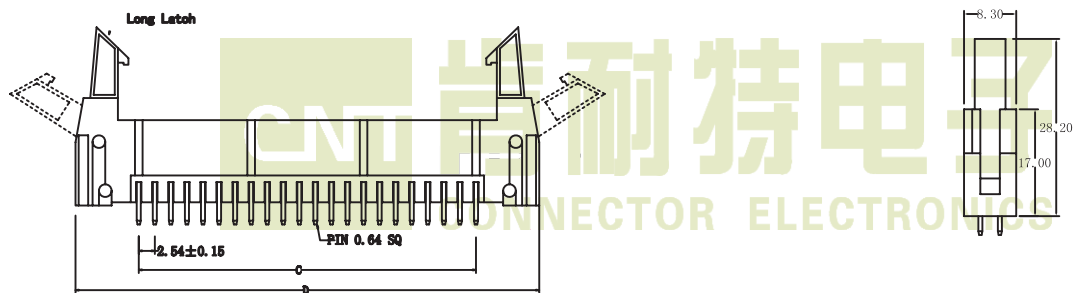

Recommended P. C. Board Hole Layout



No. of Pins Per Row		05~32
Dimension		
C	2.54*No.of Contacts-2.54	± 0.25
D	2.54*No.of Contacts+19.55	± 0.38

Ordering Information

G 254 2 * XX G S B
 G: Pitch: 2: No. of pins per Row G: GoldPlated S: Straight B: Custom Length Available
 G Box 254mm Dual Row T: Tin Plated