

REV	DESCRIPTION	DATE




SPECIFICATIONS

Current Rating: 7.9 Amps
 Insulator resistance: 1000 mΩ Min.
 Dielectric withstanding: AC/DC 1000 V
 Contact Resistance: 30mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Brass
 Insulator Material: LCP UL94V-0
 Finish: Tin Plated over nickel
 Resistance to
 soldering heat: 260° C ±5° C
 5+ -0.5sec

**Recommended P. C. Board
 Hole Layout**

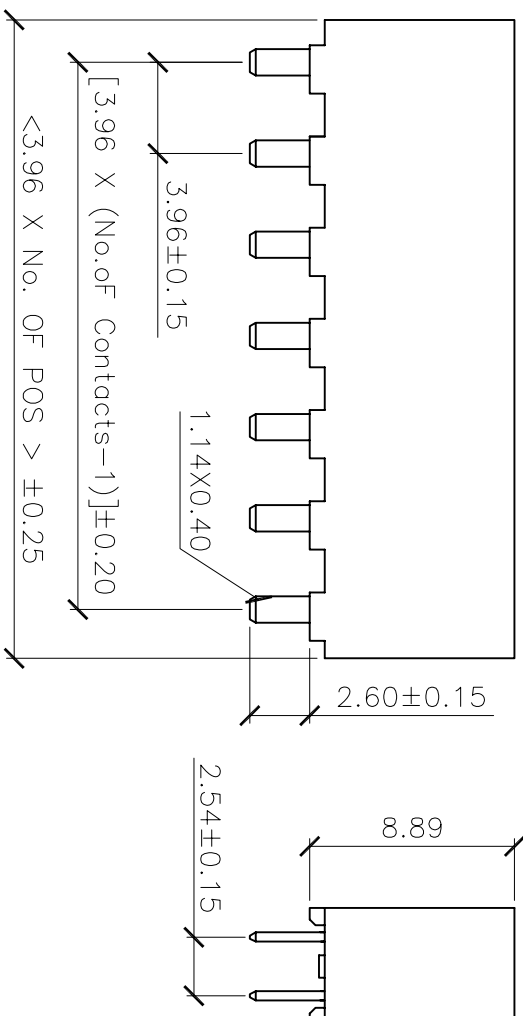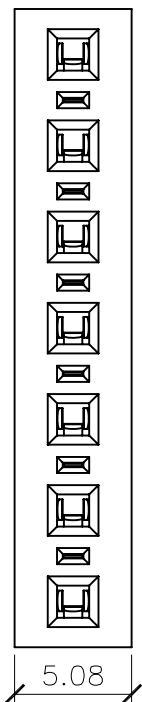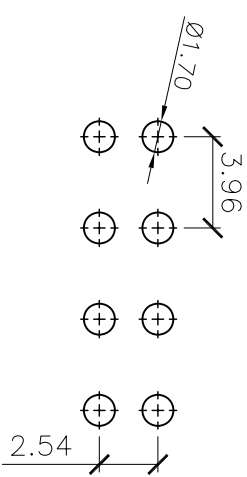

A	E
B	F
H	W

CNT 肯耐特电子有限公司

REV.	UNIT	SCALE	GENERAL TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE
1.0	mm	1:1	X.° ±5° X. ±5° XX. ±5° XXX. ±5°	Artes	20170518	CNT-F396-1*xx-TS-889/2.6-L	Pin Header Board Spacer Single Row Straight
			X.° ± X. ±0.38 XX ±0.25 XXX ±0.15	CHECK	DATE	PART. NO.	
				APPROVE	DATE		