
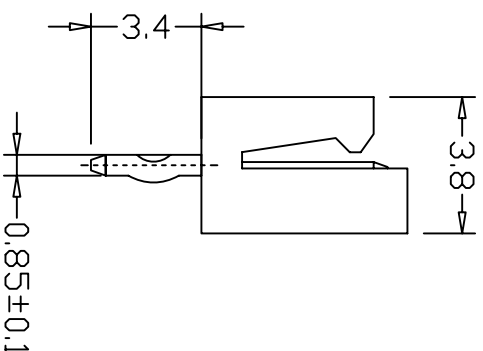


Recommand PCB Layout

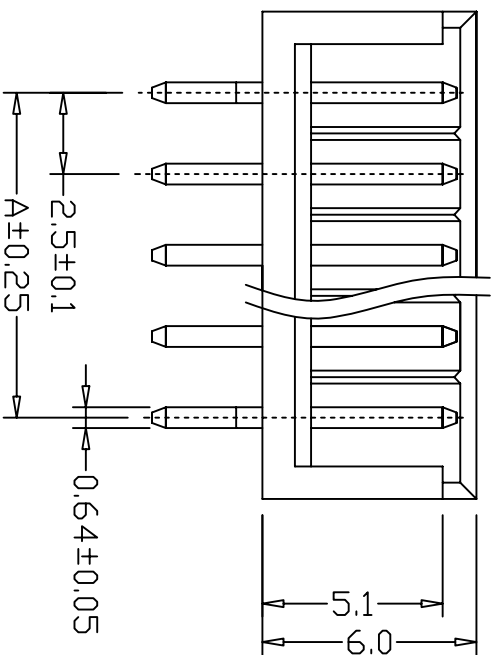

NO	PART NO	DIMENSION (mm)	
		A	B
2	1132-02	2.50	7.50
3	1132-03	5.00	10.00
4	1132-04	7.50	12.50
5	1132-05	10.00	15.00
6	1132-06	12.50	17.50
7	1132-07	15.00	20.00
8	1132-08	17.50	22.50
9	1132-09	20.00	25.00
10	1132-10	22.50	27.50
11	1132-11	25.00	30.00
12	1132-12	27.50	32.50
13	1132-13	30.00	35.00
14	1132-14	23.50	37.50
15	1132-15	35.00	40.00

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25° C - +85° C
- Contact Resistance: 20m Ω max
- soler temperature: 230-260+ -5° C
- Immersion period: 3-5+ -0.5seconds

- WAFER Storage humidity: 30%-70%

- Part NO: 1132 Storage time: semiannual

- Poles: 2-15

Material: Nylon 66 UL 94V-V0

Q`TY: 1,000pcs/bag

2.5mm Disconnectable crimp style Wafer

C N T 肯耐特电子

APPROVED BY SCALE 03.07.17

CHECKED BY UNIT

DRAWN BY mm

VER. NO. SIZE

DATE D A4

TOLERANCE
0 ± 0.25
: 00 ± 0.15
.000 ± 0.05

PART NO

CNT-1132

-XX

LTR

REVISION RECORD

DATE