

14	13	12	11	10	9	8	7	6	5	4	3	2	1
										REV.	DATE	DESCRIPTION	
										ECO NO.	SIGN	RELEASED	
										A	2007/07/27		


SPECIFICATIONS

Voltage rating: 250V AC, DC
 Current rating: 3A AC, DC
 Withstanding Voltage: 1000V AC/minute
 Insulation resistance: 1000MΩ/min
 Temperature range: -25° C +85° C
 Contact resistance: Initial value/10mΩ max
 After environmental testing/20mΩ max^a

25430204-02

WAFER

Part NO. :
 Poles: 2-12
 Material: Contact Brass, Gold plated 30"
 Base: PBT UL94V-0+15% Glass fiber
 Q'ty: 1000pcs/bag

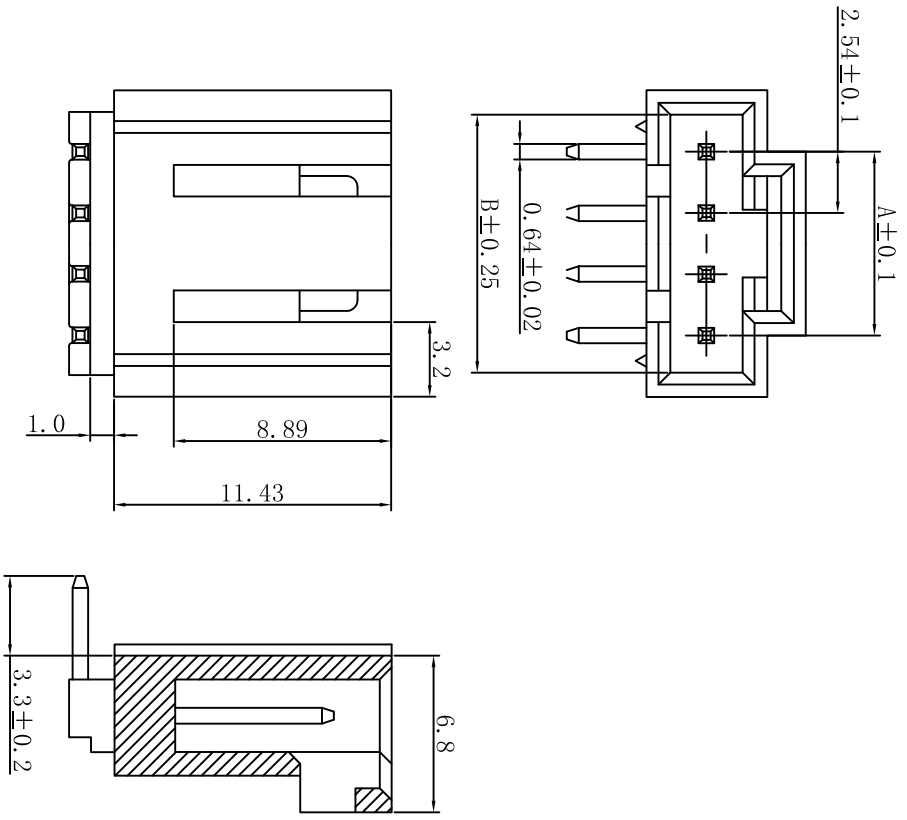

Poles	Part No	Dimension mm (in.)	
		A	B
2	25430204-02	2.54	5.59
3	25430204-03	5.08	8.13
4	25430204-04	7.62	10.67
5	25430204-05	10.16	13.21
6	25430204-06	12.70	15.75
7	25430204-07	15.24	18.29
8	25430204-08	17.78	20.83
9	25430204-09	20.32	23.37
10	25430204-10	22.86	25.91
11	25430204-11	25.40	28.45
12	25430204-12	27.94	30.99

TOLERANCE UNLESS SPECIFIED	
LINEAR	ANGLE
X ±0.30	X° XX
XX ±0.20	X° XX
XXX ±0.10	XX° XX

DATE 07.10.06	DAR. BY C L H	MATERIAL
SCALE 1/1	CHK. BY H D J	FINISH
UNIT mm	APP. BY	PART NO.

CNT 肯耐特电子有限公司

TITLE: CD-ROM 90° WAFER

DWG NO. 25430204-XX

REV. A