

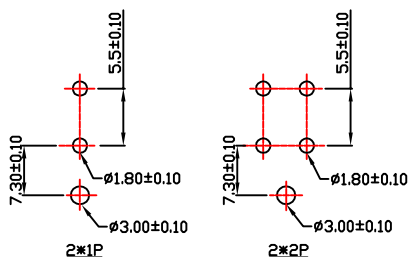


WAFER(90°)

Part No: KJ-4260WR(B)-2
 Material: pin: Brass tin-plated
 Base: Nylon66 UL 94V-2
 Circuits: 2-24circuits available
 Insulation resistance: 1000MΩ min
 Withstand Voltage: 1500V AC/minute
 Current Rating: 9A AC/DC
 Voltage Rating: 600V AC/DC

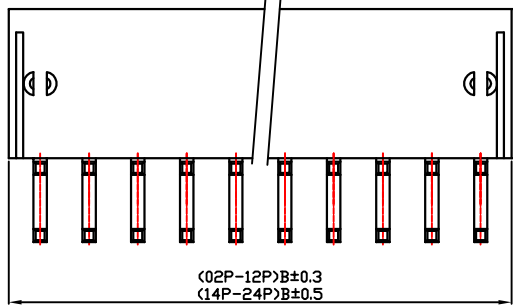


P.C.B. LAYOUT

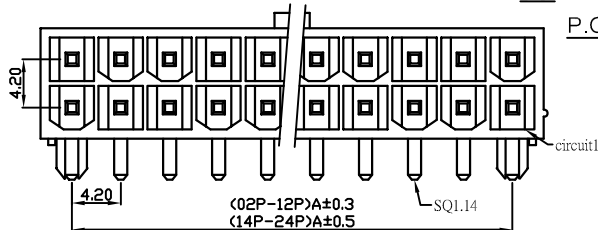


ORDERING INFORMATION:

KJ-4260WR(B)-2*P-*-*(*)

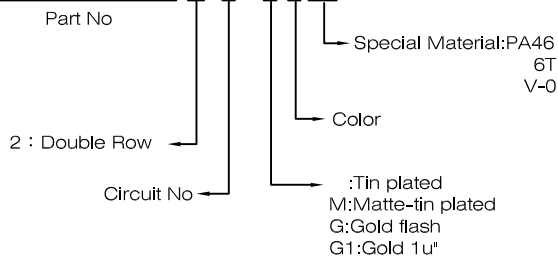

RoHS



P.C.B. LAYOUT

Dimensions

| circuit | A | B | circuit | A | B |
|---------|-------|-------|---------|-------|-------|
| 2*1 | - | 5.40 | 2*7 | 25.20 | 30.60 |
| 2*2 | 4.20 | 9.60 | 2*8 | 29.40 | 34.80 |
| 2*3 | 8.40 | 13.80 | 2*9 | 33.60 | 39.00 |
| 2*4 | 12.60 | 18.00 | 2*10 | 37.80 | 43.20 |
| 2*5 | 16.80 | 22.20 | 2*11 | 42.00 | 47.40 |
| 2*6 | 21.00 | 26.40 | 2*12 | 46.20 | 51.60 |

CNT 肯耐特电子有限公司

UNIT:MM

繪圖
DRAWING:

吳華雄

比例 (SCALE):

3:1

DESCRIPTION:

MX4.2 MINI-FIT(實心PIN)

ANGLE
±2°

DIM:
.X±0.50
.XX±0.25
.XXX±0.10

審核
CHECKED BY

凌輝

名稱 (TITLE):

MX4.2實心PIN

PART NO:

KJ-4260WR(B)-2

REV:A1

核准
APPROVAL BY

苗德蕙

存檔名稱 (FILE):

KJ-4260WR(B)-2

日期 (DATE):

2007/05/23

PROJECTION:

