
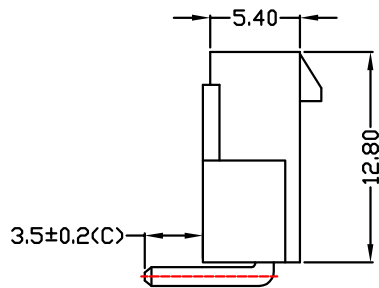
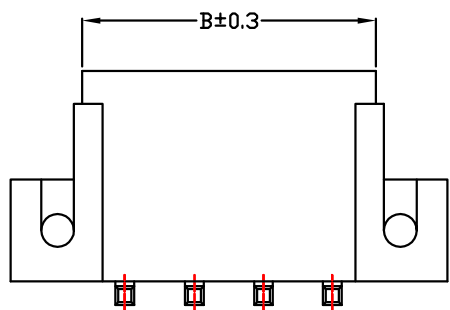


WAFER(90°)

Part No: KJ-4260WR(C)-1
 Material: pin: Brass tin-plated
 Base: Nylon66 UL 94V-2
 Circuits: 2-6circuits available
 Insulation resistance: 1000MΩ min
 Withstand Voltage: 1500V AC/minute
 Current Rating: 9A AC/DC
 Voltage Rating: 600V AC/DC

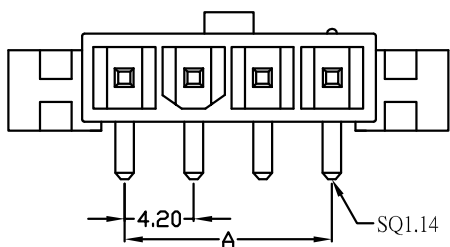

ORDERING INFORMATION:

KJ-4260WR(C)-1**P-**-*(*)

Part No

1 : Single Row



Circuit No

Special Material:PA46
6T
V-0

Color

:Tin plated
M:Matte-tin plated
G:Gold flash
G1:Gold 1u"

RoHS

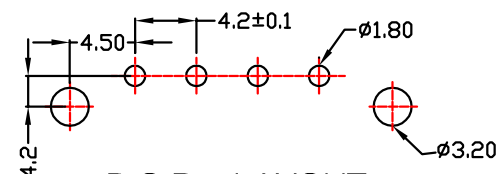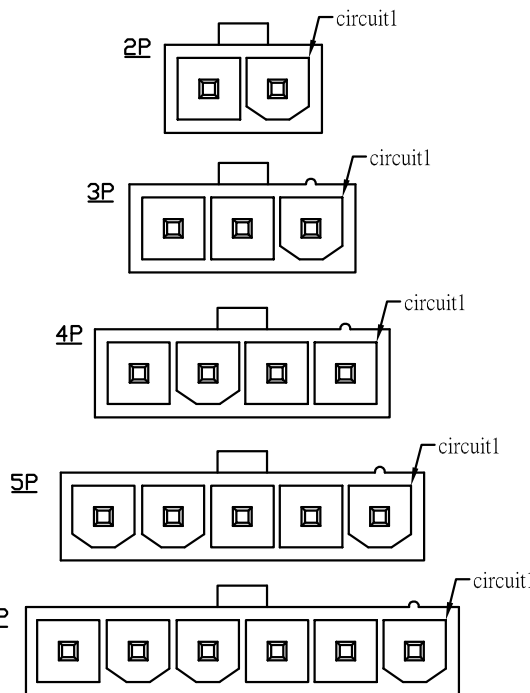

P.C.B. LAYOUT

Dimensions

| circuit | A | B |
|---------|-------|-------|
| 1*2 | 4.20 | 9.60 |
| 1*3 | 8.40 | 13.80 |
| 1*4 | 12.60 | 18.00 |
| 1*5 | 16.80 | 22.20 |
| 1*6 | 21.00 | 26.40 |

C N T肯耐特电子有限公司

UNIT:MM

繪圖
DRAWING:

吳華雄

比例 (SCALE):

2.5:1

DESCRIPTION:

MX4.2 MINI-FIT(實心PIN)

ANGLE
±2°

DIM:
.X±0.30
.XX±0.20
.XXX±0.10

審核
CHECKED BY

凌輝

名稱 (TITLE):

MX4.2實心PIN

PART NO:

KJ-4260WR(C)-1

REV:A0

核准
APPROVAL BY

苗德蕙

存檔名稱 (FILE):

KJ-4260WR(C)-1

日期 (DATE):

2007/05/24

