

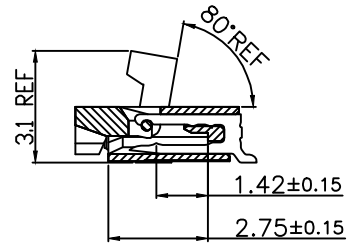
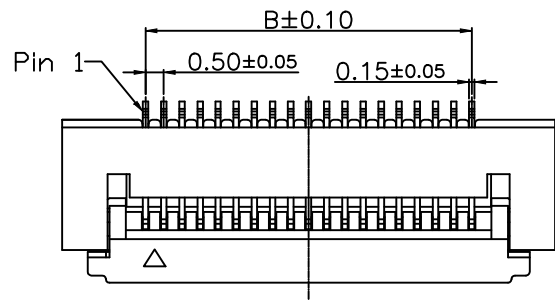


REV	DESCRIPTION	DATE

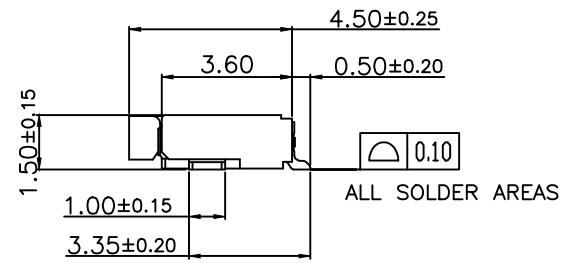

SECTION A-A

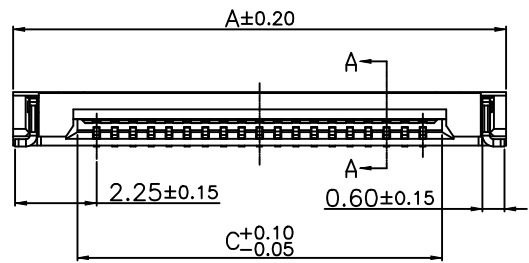


ALL SOLDER AREAS

NOTE:


- MATERIAL
HOUSING:HIGH-TEMP. THERMOPLASTIC. UL 94V-0.
ACTUATOR:HIGH-TEMP. THERMOPLASTIC. UL 94V-0.
CONTACT:COPPER ALLOY.
PLATING:TIN OR GOLD PLATED OVER NICKEL.
HOLDDOWN:COPPER ALLOY.PLATING:TIN OR GOLD PLATED OVER NICKEL.
- ELECTRICAL
CURRENT:0.5A MAX.
DIELECTRIC WITHSTANDING VOLTAGE:250V AC MIN.
CONTACT RESISTANCE:20mΩ MAX.
INSULATION RESISTANCE:50MΩ MIN.
- ENVIRONMENTAL
TEMPERATURE:-25°C TO +85°C
- WITH "A","B","C"."O"MAJOR DIMENSION FOR QC.
- PART NO.
CNT-FPC050-XX-TDM-S20-150

■ DIMENSIONAL INFORMATION

PIN	A	B	C	PIN	A	B	C	PIN	A	B	C
04P	6.10	1.50	2.57	23P	15.60	11.00	12.07	42P	25.10	20.50	21.57
05P	6.60	2.00	3.07	24P	16.10	11.50	12.57	43P	25.60	21.00	22.07
06P	7.10	2.50	3.57	25P	16.60	12.00	13.07	44P	26.10	21.50	22.57
07P	7.60	3.00	4.07	26P	17.10	12.50	13.57	45P	26.60	22.00	23.07
08P	8.10	3.50	4.57	27P	17.60	13.00	14.07	46P	27.10	22.50	23.57
09P	8.60	4.00	5.07	28P	18.10	13.50	14.57	47P	27.60	23.00	24.07
10P	9.10	4.50	5.57	29P	18.60	14.00	15.07	48P	28.10	23.50	24.57
11P	9.60	5.00	6.07	30P	19.10	14.50	15.57	49P	28.60	24.00	25.07
12P	10.10	5.50	6.57	31P	19.60	15.00	16.07	50P	29.10	24.50	25.57
13P	10.60	6.00	7.07	32P	20.10	15.50	16.57	51P	29.60	25.00	26.07
14P	11.10	6.50	7.57	33P	20.60	16.00	17.07	52P	30.10	25.50	26.57
15P	11.60	7.00	8.07	34P	21.10	16.50	17.57	53P	30.60	26.00	27.07
16P	12.10	7.50	8.57	35P	21.60	17.00	18.07	54P	31.10	26.50	27.57
17P	12.60	8.00	9.07	36P	22.10	17.50	18.57	55P	31.60	27.00	28.07
18P	13.10	8.50	9.57	37P	22.60	18.00	19.07	56P	32.10	27.50	28.57
19P	13.60	9.00	10.07	38P	23.10	18.50	19.57	57P	32.60	28.00	29.07
20P	14.10	9.50	10.57	39P	23.60	19.00	20.07	58P	33.10	28.50	29.57
21P	14.60	10.00	11.07	40P	24.10	19.50	20.57	59P	33.60	29.00	30.07
22P	15.10	10.50	11.57	41P	24.60	20.00	21.07	60P	34.10	29.50	30.57

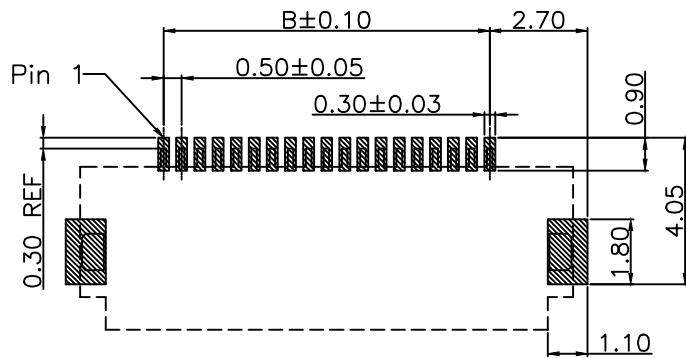

RECOMMEND PCB LAYOUT
TOLERANCE:±0.05

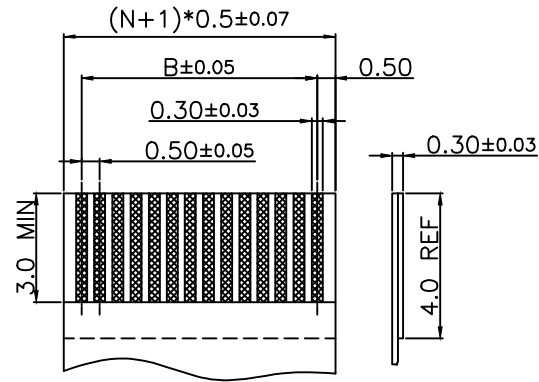

APPLICABLE FFC
TOLERANCE:±0.05

<p>CNT 肯耐特电子有限公司</p>				GENERAL TOLERANCE		DRAWN 董道丽		DATE 20191011		DWG. NO.		TITLE	
				X.° ±5°	X. ±0.30	CHECK 王芳芳		DATE 20191011		PART. NO.			
REV. 1.0	UNIT mm	SCALE 1:1		.X° ±3°	.X ±0.38	APPROVE 王元中		DATE 20191011		CNT-FPC050-XX-TDM-S20-150		FPC 0.5mm 单面下接 掀盖式 平脚位 SMT90度 (H=1.5mm)	
				.XX° ±2°	.XX ±0.25								
				.XXX° ±1°	.XXX ±0.15								